




HDC MF 24B AF

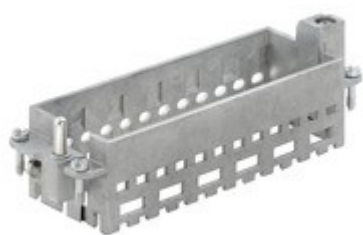

General ordering data

Version	Frame
Order No.	1429050000
Type	HDC MF 24B AF
GTIN (EAN)	4050118233285
Qty.	1 pc(s).

Dimensions and weights

Depth	37.35 mm
Depth (inches)	1.47 inch
Height	36.4 mm
Height (inches)	1.433 inch
Width	111 mm
Width (inches)	4.37 inch
Net weight	97.2 g

Temperatures

Limit temperature	-40 °C ... 125 °C
-------------------	-------------------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
SCIP	d447edfa-0214-4f34-b5ba-82eae491b46a

General data

Material	Diecast zinc
Number of slots	6
Plugging cycles	≥ 500
Series	ModuPlug
Size	8

PE connection data

Conductor cross-section, max.	10 mm ²
Conductor cross-section, min.	0.5 mm ²
Connection type PE	Screw connection
Tightening torque, max. PE connection	1.2 Nm

Downloads

Approval/Certificate/Document of Conformity	<u>Manufacturer's declaration</u>
Engineering Data	<u>CAD data -- STEP</u>
Eplan Data Portal	<u>Eplan data</u>
CADENAS eCATALOG	<u>CAX data</u>
WSCAD Universe	<u>WSCAD data</u>
Catalogues	<u>Catalogues in PDF-format</u>
Brochures	<u>FL FIELDWIRING EN</u> <u>FL FIELDWIRING EN</u>

Classifications

ETIM 6.0	EC002312
ETIM 7.0	EC002312
ETIM 8.0	EC002312
ETIM 9.0	EC002312
ECLASS 9.0	27-44-02-06
ECLASS 9.1	27-44-02-06
ECLASS 10.0	27-44-02-06
ECLASS 11.0	27-44-02-06
ECLASS 12.0	27-44-02-92
ECLASS 13.0	27-44-02-92

Approvals

Approvals	
ROHS	Conform
UL File Number Search	<u>UL Website</u>
Certificate No. (cURus)	E92202

Related products:



Order No.: 1429070000
Type: HDC MF 24B FA

Version:
Frame

[PDF data sheet](#)

[Add to Inquiry List](#)