

16

1633 03


Power supply connectors



Power supply plug, straight version, with fork-shaped contact, solder eyes and bend protection

16

1633 03

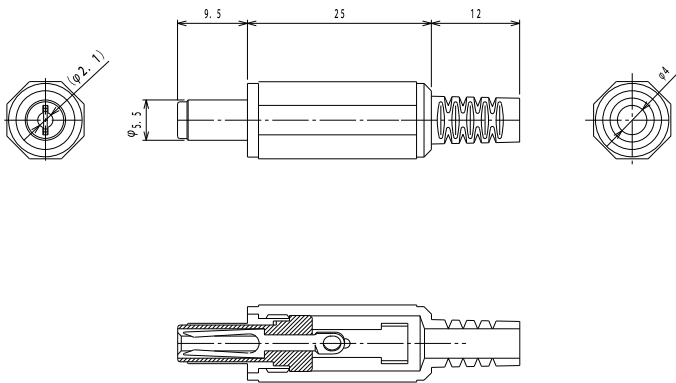

Environmental conditions

Temperature range -20 °C/+70 °C

Materials

Insulating body POM
Contact Cu alloy/Fe, nickel-plated
Housing PE

Mechanical data

Outer diameter 5.5 mm
Inner diameter 2.1 mm

Connectable conductors for solder area

Cable diameter 4 mm

Electrical data (at T_{amb} 20 °C)

Contact resistance ≤ 30 mΩ
Rated current 2 A
Rated voltage 24 V DC
Rated impulse voltage 500 V/60 s
Insulation resistance ≥ 100 MΩ

Associated products

Counterparts

☞ 1610 06	☞ 1613 14	☞ 1613 18
☞ 1613 28	☞ 1613 30	☞ 1613 32
☞ 1614 09	☞ 1614 14	☞ 1614 16
☞ 1614 19	☞ 1614 23	☞ NEB 21 R-C
☞ NEB/J 21	☞ NEB/J 21 C	☞ NEB/J 21 R
☞ NEK/J 210		

16

1633 03

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
1633 03	2	100	500