
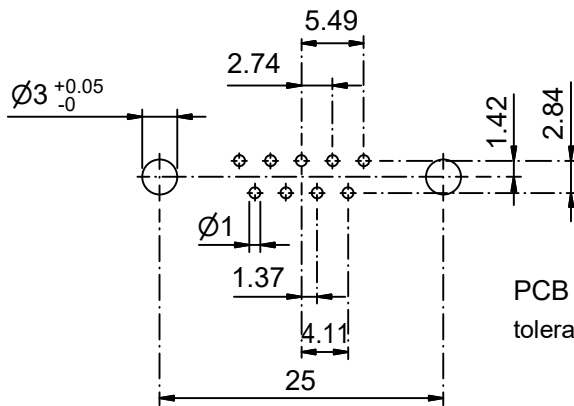

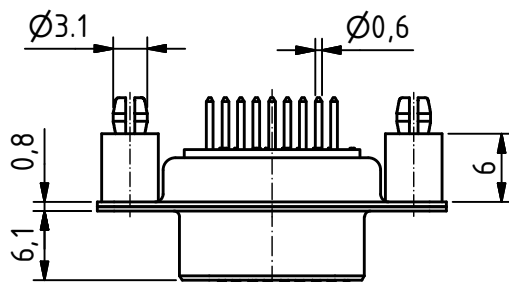



RoHS compliant

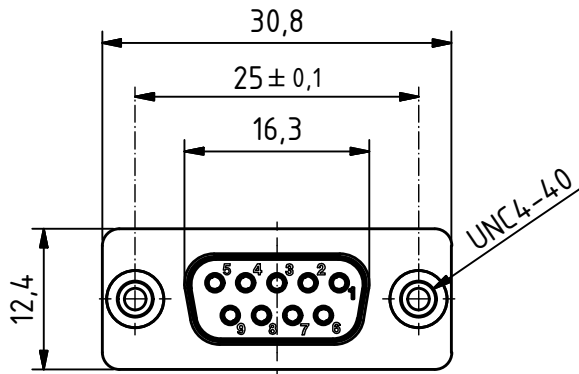

PCB Layout
tolerances +/-0.1

MATERIALS


- Insulator: Thermoplastic UL 94-V-0 white
- Contact: Machined / Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

CHARAKTERISTICS

- Working voltage: 125V
- Current rating: 7.5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

Product is
suitable for
Wave Solder
Process

General tolerances (Delttron standard)				
size in mm				
	> 0.5	> 3	> 6	> 30
up to 3	±0.1	±0.2	±0.2	±0.3
up to 6				
up to 30				
up to 120				

	All dimensions in mm	Rev.	Rev.	Rev.	DE002399		
		Rev.	Rev.	Rev.	part no.		
DTS09SY/2M86UN				1.5:1 scale	drawn	05.03.2010	mr
					checked		
					approved		
				K050504 drawing no.			
Industrie NeuhoF 8c CH-3422 Kirchberg www.d-sub.swiss							