
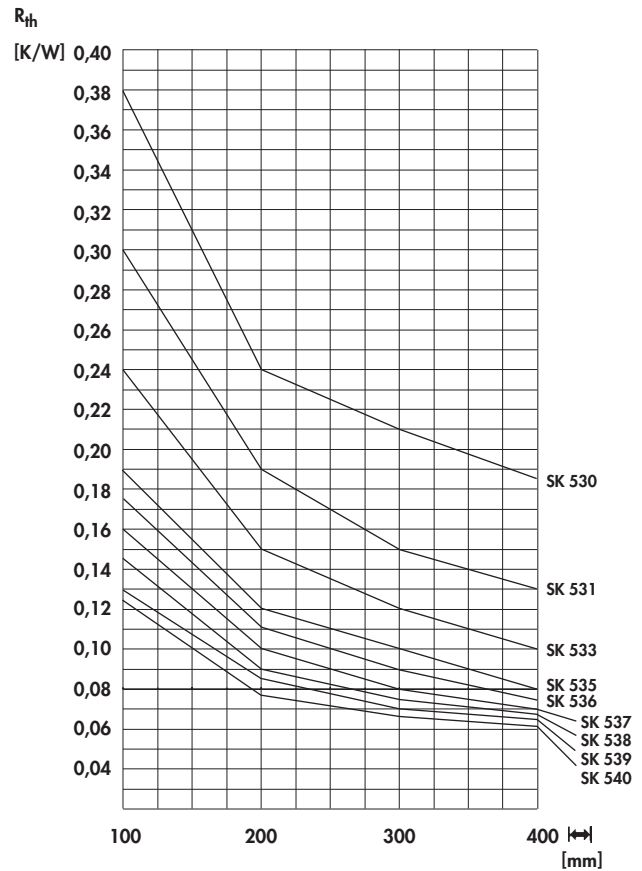


Welded high performance heatsinks

- optimum fin geometry and fin quantity for free convection
- well suited for forced convection
- flat milled base (not SK 530, SK 531)
- * = welded joint (not SK 530, SK 531)
- length according customer's details
- customer specific versions and machining on request

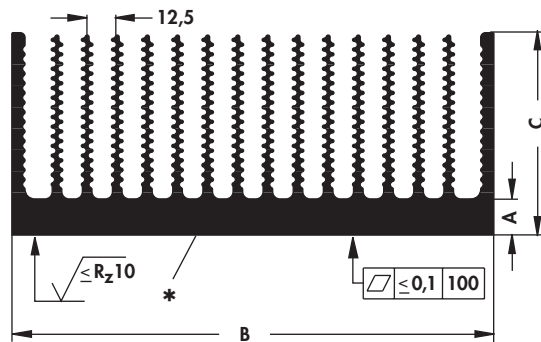

art. no.	number of fins	dim. [mm]		
		A	B	C
SK 530 ...	14	15 ±0.7	200 ±0.7	84 ±0.7
SK 531 ...	22	15 ±0.7	300 ±1	84 ±0.7
SK 533 ...	30	16 +0/-1.5	400 +0.6/-1.6	84 +0/-1.5
SK 535 ...	38	16 +0/-1.5	500 +0.6/-1.6	84 +0/-1.5
SK 536 ...	42	16 +0/-1.5	550 +0.6/-1.6	84 +0/-1.5
SK 537 ...	46	16 +0/-1.5	600 +0.6/-1.6	84 +0/-1.5
SK 538 ...	50	16 +0/-1.5	650 +0.6/-1.6	84 +0/-1.5
SK 539 ...	54	16 +0/-1.5	700 +0.6/-1.6	84 +0/-1.5
SK 540 ...	58	16 +0/-1.5	750 +0.6/-1.6	84 +0/-1.5
please indicate: ...  200 300 400 500 600 mm				