


ROHS Compliant



台灣駿品端子股份有限公司





TAIWAN KING PIN TERMINAL CO.,LTD

新北市樹林區俊德街 23 號

TEL:886-2-26895596.26886112 FAX:886-2-26886110



E-mail:info@tkp.com.tw

http://www.tkp.com.tw

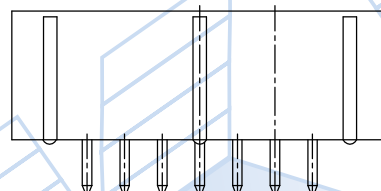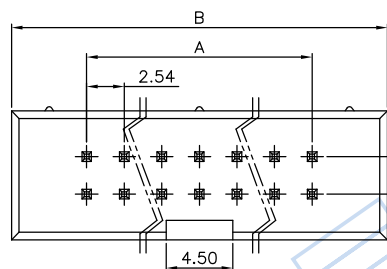

NOTE :

- * Material : Nylon UL 94V-0
- * Color : Black
- * Contact : Brass
- * Finish : Plated Gold over Nickel
- * Current rating : 3A, AC/DC
- * Voltage rating : 500V, AC/DC
- * Dual row 6-64 pins

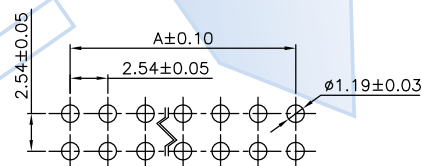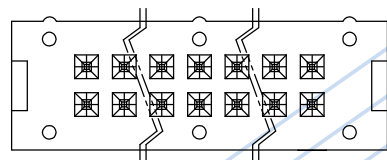

RECOMMENDED PCB LAYOUT



CIRCUITS	PART NO.	DIM. A	DIM. B	CIRCUITS	PART NO.	DIM. A	DIM. B
6	PIDC254M11-6	5.08	15.24	30	PIDC254M11-30	35.56	45.72
8	PIDC254M11-8	7.72	17.78	34	PIDC254M11-34	40.64	50.80
10	PIDC254M11-10	10.16	20.32	40	PIDC254M11-40	48.26	58.42
12	PIDC254M11-12	12.70	22.86	42	PIDC254M11-42	50.80	60.96
14	PIDC254M11-14	15.24	25.40	44	PIDC254M11-44	53.34	63.50
16	PIDC254M11-16	17.78	27.94	50	PIDC254M11-50	60.96	71.12
20	PIDC254M11-20	22.86	33.02	60	PIDC254M11-60	73.66	83.82
24	PIDC254M11-24	27.94	38.10	64	PIDC254M11-64	78.74	88.90
26	PIDC254M11-26	30.48	40.64				

PART NO.	PIDC254M11-XX	Part NO.	Material	Color/Finish	Remark	APPROVAL
TITLE	2.54mm Wire to Board					DRAWN: 高瑋瑩
THIRD ANGLE	SCALE	UNIT	SHEET NO	TOLERANCE	DATE	ODD NUMBERS
	free	mm	1/1	.X± 0.30 .XXX±0.10 .XX± 0.20	2012.10.29	ENG951506
	254-170		A254-017	ANGLE±2°		REV A1
						APPROVED: 陳泓宇