PART NO.	ENG. NO.	
02-09-1103	1189-(P901)L	
02-09-1101	1189-(P901)	



SECT. "A-A"



SECT. "B-B"

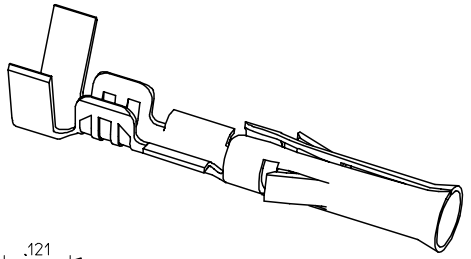



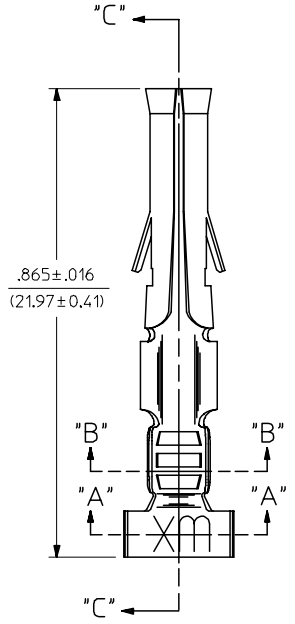

SECT. "C-C"

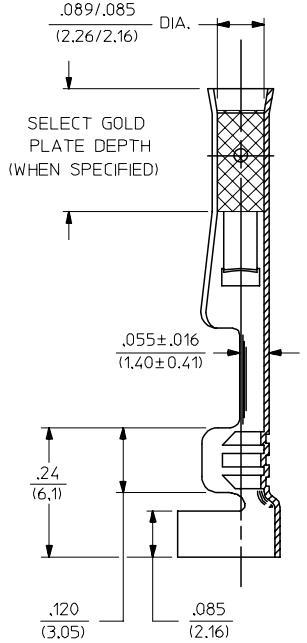

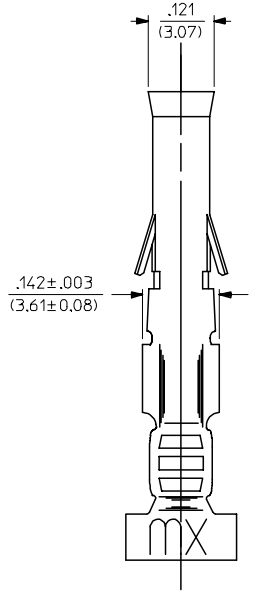

NOTES:

1. MATERIAL: CARTRIDGE BRASS, ALLOY #C26000, .010/(0.25) THICK
2. FINISH CODE:
   901 HOT TIN DIP .000020/(0.00051) MIN.
3. THIS PART CONFORMS TO PROD. SPEC. 02-09.
4. PACKAGING INFORMATION: NOT AVAILABLE
5. TERMINAL FOR USE WITH .093/(2.36) SERIES HOUSINGS AND WILL ACCEPT 14 THRU 20 AWG WIRE.
6. INSERTION FORCE: 3.5 LBS. MAX. WHEN TERMINAL IS INSERTED INTO AN .093 SERIES HOUSING.
7. RETENTION: 20 LBS. MIN. FROM HOUSING.

LEGEND

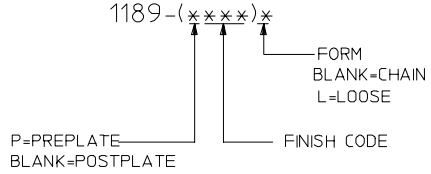

CHAIN FORM
FULL SCALE



MODIFIED CHART
EC NO: UCP2006-1089
DRWN:DPETERSON 2005/11/18
CHKD:FSMITH 2005/11/29
APPR:FSMITH 2005/12/02
DESCRIPTION
REV
D1

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .010
2 PLACES	± 0.25	± .014
1 PLACE	± 0.35	± ---
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: 6:1
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

DRAWN BY	GWC
DATE	1995/02/10
CHECKED BY	RW
DATE	1995/02/10
APPROVED BY	RAS
DATE	1995/02/10

TITLE: CRIMP TERMINAL, FEMALE, DIMPLED .093/(2.36) DIA. 14-20 AWG

molex MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-1189-**
SHEET NO.: 1 OF 1

SIZE C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION