

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0502128100**
Status: **Active**
Description: 2.00mm Pitch Crimp Terminal, Female, 24-30 AWG, Bag

Documents:

- [3D Model](#)
[Drawing \(PDF\)](#)
[Product Specification PS-51065-005 \(PDF\)](#)
[Product Specification PS-51065-016-001 \(PDF\)](#)
[Product Specification PS-51065-017-001 \(PDF\)](#)
[Product Specification PS-51065-018-001 \(PDF\)](#)
[Product Specification PS-51089-001 \(PDF\)](#)
[Product Specification PS-51089-005-001 \(PDF\)](#)
[Product Specification PS-51090-003 \(PDF\)](#)
[Product Specification PS-51090-004-001 \(PDF\)](#)
[Product Specification PS-51090-005-001 \(PDF\)](#)
[Product Specification PS-51090-009 \(PDF\)](#)
[Product Specification PS-51090-016-001 \(PDF\)](#)
[Product Specification PS-51090-017-001 \(PDF\)](#)
[Product Specification PS-51090-018-001 \(PDF\)](#)
- [Product Specification PS-51160-001 \(PDF\)](#)
[Product Specification PS-51160-006-001 \(PDF\)](#)
[Product Specification PS-51225-003-001 \(PDF\)](#)
[Product Specification PS-52968-006-001 \(PDF\)](#)
[Product Specification PS-52968-007-001 \(PDF\)](#)
[Product Specification PS-53717-002-001 \(PDF\)](#)
[Product Specification PS-54111-002-001 \(PDF\)](#)
[Product Specification PS-54214-001 \(PDF\)](#)
[Product Specification PS-54452-007-001 \(PDF\)](#)
[Product Specification PS-55533-004-001 \(PDF\)](#)
[Application Specification 510900001-000 \(PDF\)](#)
[Packaging Specification SPK-50212-001-001 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)
[Product Literature \(PDF\)](#)

General

Product Family	Crimp Terminals
Series	50212
Application	Signal, Wire-to-Board
Crimp Quality Equipment	Yes
Packaging Alternative	50212-8000 (Reel)
Product Literature Order No	987651-8983
Product Name	DuraClik, Mi II, Micro-Latch, Sherlock
UPC	800754369473

Physical

Gender	Female
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Net Weight	20.400/mg
Packaging Type	Bag
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.40mm max.
Wire Size AWG	24, 26, 28, 30
Wire Size mm ²	N/A


Electrical

Current - Maximum per Contact	2.0A
Voltage - Maximum	125V

Material Info

Reference - Drawing Numbers

Application Specification	510900001-000
Crimp Specification	CS-50212
Packaging Specification	SPK-50212-001-001
Product Specification	PS-51065-005, PS-51065-016-001, PS-51065-017-001, PS-51065-018-001, PS-51089-001, PS-51089-005-001, PS-51090-003, PS-51090-004-001, PS-51090-005-001, PS-51090-009, PS-51090-016-001, PS-51090-017-001, PS-51090-018-001, PS-51160-001, PS-51160-006-001,

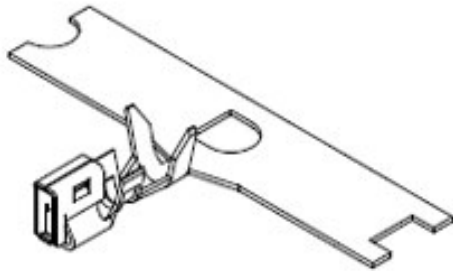

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per
-ED/88/2018 (15
January 2019)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China RoHS

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

50212 Series

Use With

DuraClik Receptacle Housing [502351](#)

Micro-Latch Receptacle Housing [51065](#)

Mi II Receptacle Housings [51089](#) ,
[51090](#)

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Extraction Tool	11030043
Hand Crimp Tool for 2.00mm Pitch Terminal, 24-30 AWG	638190500

Japan

Description	Product #
Extraction Tool	571056000

PS-51225-003-001, PS-52968-006-001,
PS-52968-007-001, PS-53717-002-001,
PS-54111-002-001, PS-54214-001, PS-54452-007-001,
PS-55533-004-001
SD-50212-001

Hand Crimp Tool 571765000

Sales Drawing

This document was generated on 02/11/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION